Replace the bulb

⚠ Warning

- When replacing the bulb, be aware that it may have shattered since it has stopped working. If replacing the bulb in a ceiling-mounted projector, take precautions as the bulb may already be broken. When removing the bulb cover, glass fragments may fall. If glass fragments enter the eyes or mouth, seek immediate medical attention.
- Do not disassemble or modify the bulb. Installing and using a modified or disassembled bulb on the projector may cause fire, electric shock, or accidents.


⚠ Attention

- Do not touch the lamp cover immediately after turning off the projector, as it remains hot. Wait a moment before opening the lamp cover until the lamp has cooled down sufficiently. Otherwise, it may cause burns.
- Ensure the bulb and bulb cover are securely installed. Do not turn on the power if not properly installed.
- The bulb contains mercury. Please dispose of used bulbs in accordance with local regulations for fluorescent lamp disposal.

1 Button or control panel ⏻


Press the power button to turn off, then disconnect the power cord.

2 Loosen the lamp cover fixing screws




3 Remove the bulb cover

Slide the bulb cover straight forward and lift it off to remove.

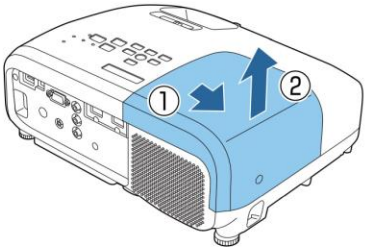


4 Loosen the two fixing screws of the bulb

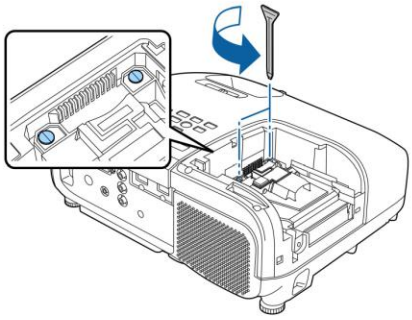


5 Remove the old bulb

Grasp the protruding part and pull it straight out

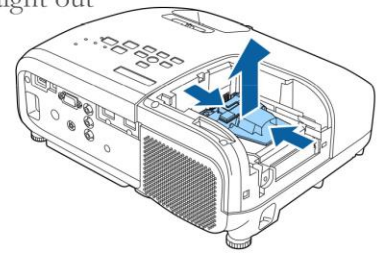


6 Install a new light bulb

Ensure the bulb faces the correct direction and press it in

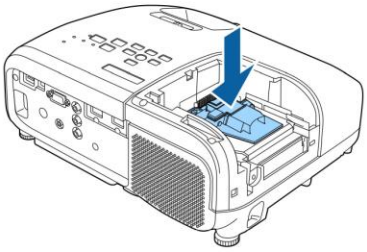


7 Tighten the two fixing screws of the bulb

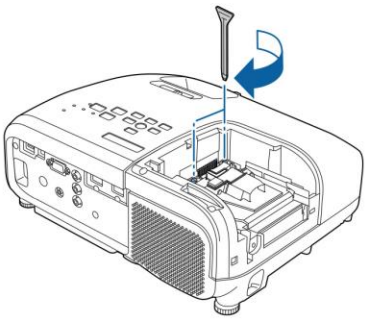


8 Install light bulb cover

Slide the bulb cover back into place

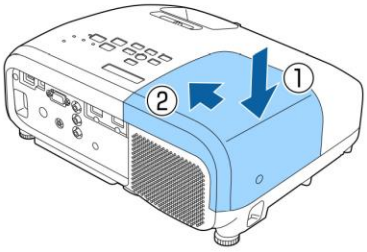

9 Tighten the lamp shade fixing screws



Lamp Timer Reset

After replacing the bulb, ensure to reset the lamp timer.

The projector records the bulb operating time and notifies you via message and indicator light when a bulb replacement is needed.


1 Turn on the power

2 Press Menu button

Display configuration menu

3 Select Reset —Light time reset

Display reset confirmation

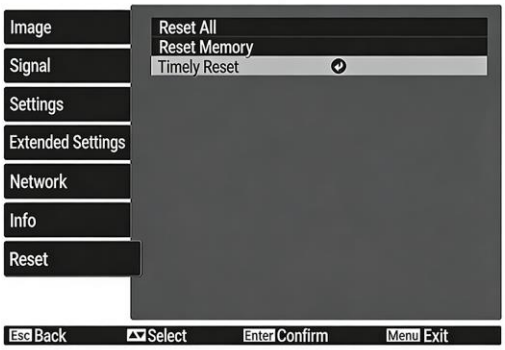

4 Use ◁▷ Select "Yes"
then press Enter
press the button to execute

The light was reset

